

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 July 2003 (17.07.2003)


PCT

(10) International Publication Number
WO 03/058152 A1

- (51) International Patent Classification⁷: **F41H 11/16** (74) Agent: **FARRAR, Chris**; IP QinetiQ Formalities, Cody Technology Park, A4 Building, Ively Road, Farnborough, Hampshire GU14 0LX (GB).
- (21) International Application Number: **PCT/GB02/05937**
- (22) International Filing Date:
30 December 2002 (30.12.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0200369.7 9 January 2002 (09.01.2002) GB
- (71) Applicant (for all designated States except US): **QINETIQ LIMITED** [GB/GB]; Registered Office, 85 Buckingham Gate, London SW1E 6PD (GB).
- (72) Inventors; and
(75) Inventors/Applicants (for US only): **LOWERY, Brett, Robert** [GB/GB]; QinetiQ Limited, Cody Technology Park, Farnborough, Hampshire GU14 0LX (GB). **PACKARD, Thomas, James** [GB/GB]; DSTL Chertsey, Chobham Lane, Chertsey, Surrey KT16 0EE (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Declaration under Rule 4.17:**
— of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: MINEPLOUGH

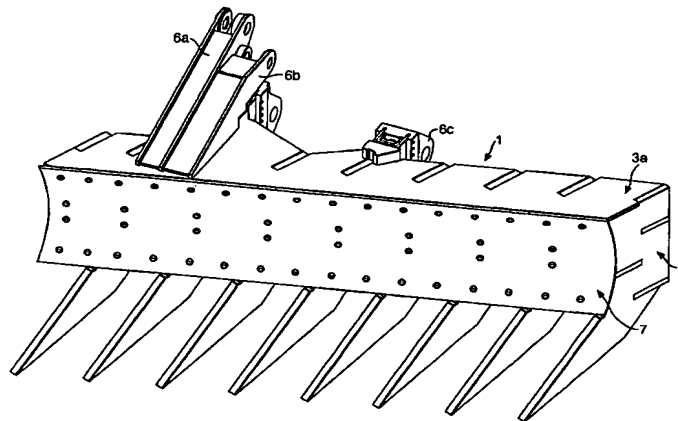

(57) Abstract: A mineplough (1) which is designed to be resilient to exploding mines comprises one or more blades set at an angle to the general direction of movement of the plough so as to deflect lifted earth to one or both sides of the plough and having tines (5b-5j) arranged so as to lift earth ahead of the blade in the direction of travel thereof, depth control means for controlling the depth of cut of the tines and at least two linkages to connect the blade to a suitable carrier vehicle for the mineplough. The blade is comprised of a number of intersecting strong metal plates (2a-2j; 3a-3d) whose planes lie substantially parallel to the direction of travel of the mineplough and which define relatively narrow open channels therebetween so as to allow venting of any explosion caused by a mine exploding in contact with the blade. The blade may be faced with a relatively thin metal or plastics sheet (7) to absorb some of the force of any explosion and further protection is provided by the fact that each linkage contains at least one crushable element (8) capable of absorbing blast energy.

WO 03/058152 A1